


Physical Specifications

Model:	FRV 100i	FRV 200i
No. Test Stations	1	2
Tablet Type	Uncoated Tablets	Uncoated Tablets
Unit Dimensions (w x d x h)	316 x 343 x 325 mm	407 x 343 x 325 mm
Mass (kg)	9	10

Technical Specifications

Model:	FRV 100i	FRV 200i
Drum Rotation Speed	10 to 60 RPM $\pm$ 1 RPM	
Test Run Time	0 to 99 H: 59 M: 59 S $\pm$ 1 % (1 S) / 0 to 60,000 revolutions	
Operating Temperature	15 °C to 30 °C	
Humidity	10 % to 85 % (non-condensing)	
Mains Supply	100 - 240 V, 50/60 Hz	
Isolation Classification	Class 1 - MUST BE EARTHED	
Power Consumption	50 W Max	
Fuses	2 x 2 A (Type T)	
Data Output	RS-232 USB A (For connection with a USB printer) USB B (for connection with a PC)	

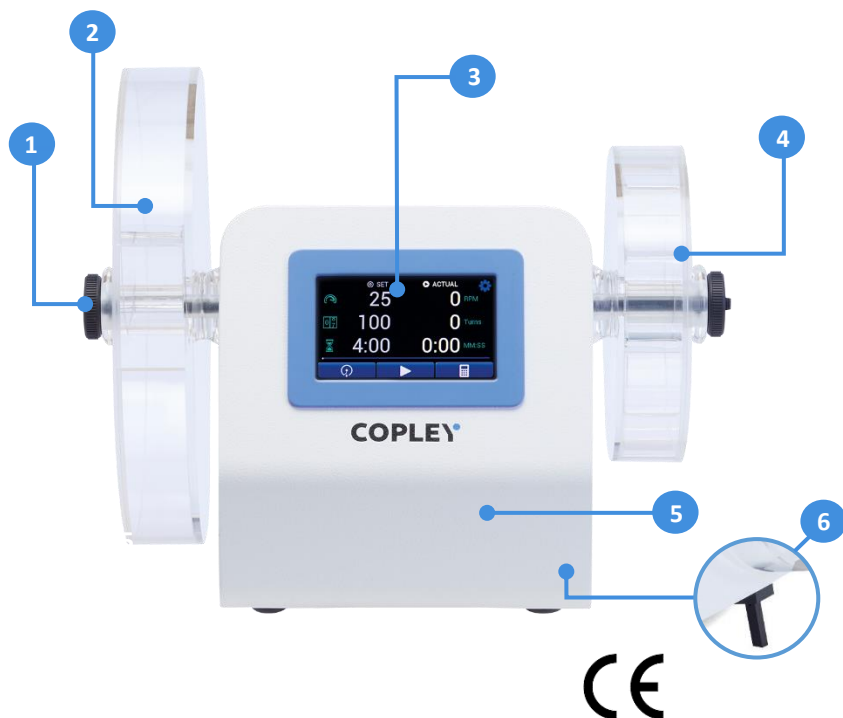

- | | |
|------------------------------------|------------------------|
| 1 Friability Drum | 4 Retaining Nut |
| 2 LCD Resistive 5-inch Touchscreen | 5 Protective Enclosure |
| 3 Abrasion Drum (optional) | 6 10° Angle Adapter |